R-QS803
Professional Line Array Column Speaker

Product Description

Designed for use in human voice reinforcement systems such as small and medium-sized video conference rooms, digital courtrooms, conference centers, and lecture halls,as well as background music systems for various architectural spaces such as churches, museums, transportation hubs, and public areas in squares. Solve the problem of traditional conference room speakers being too large in volume and unattractive when hung on the wall.By using constant beam technology in linear array sound column speakers, the problem of traditional conference room speaker projection and interference is solved.

Features

*The array sound column speaker adopts a streamlined design, with a beautiful and practical appearance, suitable for sound
reinforcement in various building spaces.
*The sound column speaker adopts an ABS mixed glass fiber reinforced box, which is sturdy and durable.
*The circular waveguide hole in the front and the damping port at the back of the box form a unique low-frequency heart-shaped
diffusion, with clear and pleasant high notes, natural and thick timbre, and full bass.
*8x3 " high performance driver unit and 1x1” neodynium tweeter unit.
*UV waterproof dip coating, IPX5 waterproof grade, can be installed indoors and outdoors (optional).
*UL94V-0 flame retardant grade material (optional).
*Iron mesh cover, rust proof box.
*Aluminium fast and easy hang up swivel and tilt wall bracket.


Specification

Model	R-QS803
Bass unit specification	8x3“
Tweeter	1x1 "neodymium tweeter, pre compressed equalizer
Impedance	4 Ω
Rated power	270W
Peak power	1080W
Sensitivity (1W/1m)	93dB
Sound pressure level	124dB
Frequency response range	100Hz~20kHz
Speaker case material	ABS mixed glass fiber
Mesh cover material	Iron
Diffusion angle (-6dB)	Vertical: 30 °, horizontal: 160 °
Color	Black/white
Size (H x W x D)	945x98x153mm
Net weight of product	4.85kg
Packaging weight	8.31kg
Protection grade	IP55 (reference)

Professional Line Array Column Speaker ARVOX



Dimensions and installation

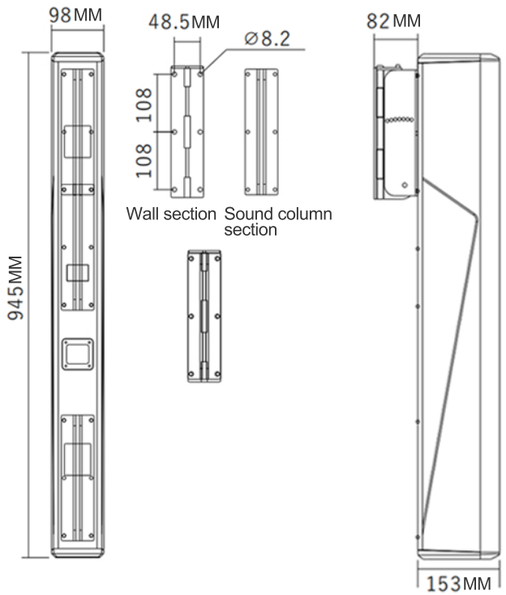





Bracket flat installation

Maximum adjustable angle of bracket

Aluminium fast hang swivel / tilt wall bracket

Application

